

# Fusor<sup>®</sup> 231/234 Sound Dampening Material

**FUSOR<sup>®</sup>**  
Repair Adhesives

***Reduce Noise, Vibration and Harshness on Metal Panels with No Mess or Read-Through!***



**NVH Reduction** – reduces noise, vibration and harshness.

**Excellent Appearance** – provides flexible seal with no shrinkage or read-through; non-expanding.

**Versatile** – use between roof bows and roof skin, door skin and intrusion beam, quarter panel and inner structure, hood and deck lid skins.

**Extended Work Time** – allows for use on repairs where more time is required.

**Non-Sag** – remains in position when applied on vertical or overhead surfaces.


**Excellent Adhesion** – provides excellent adhesion to metal, e-coat and existing NVH materials.

Part #	Description	Cartridge Size	UPC #	Case Qty	Weight (lbs)	VOC #	DOT #
231	Sound Dampening Material	300ML	808498102202	6	7.6	0.0%	N/A
234	Sound Dampening Material	50ML	808498102233	12	4	0.0%	N/A

**LORD**

## Applications:

- Roof bows and roof skin
- Door skin and intrusion beam
- Quarter panel and inner structure
- Hood and deck lid skins.

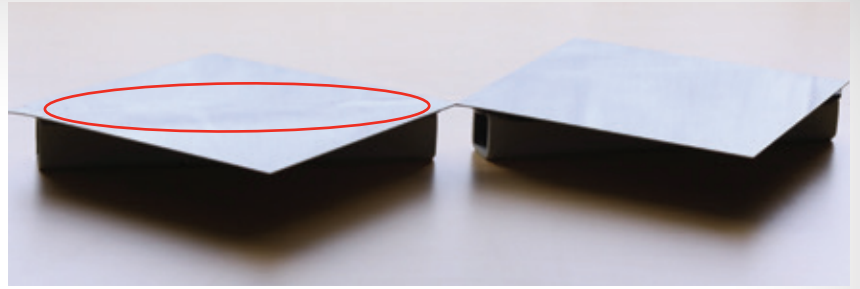


Read-Through

No Read-Through



OEM Sound Dampening Material

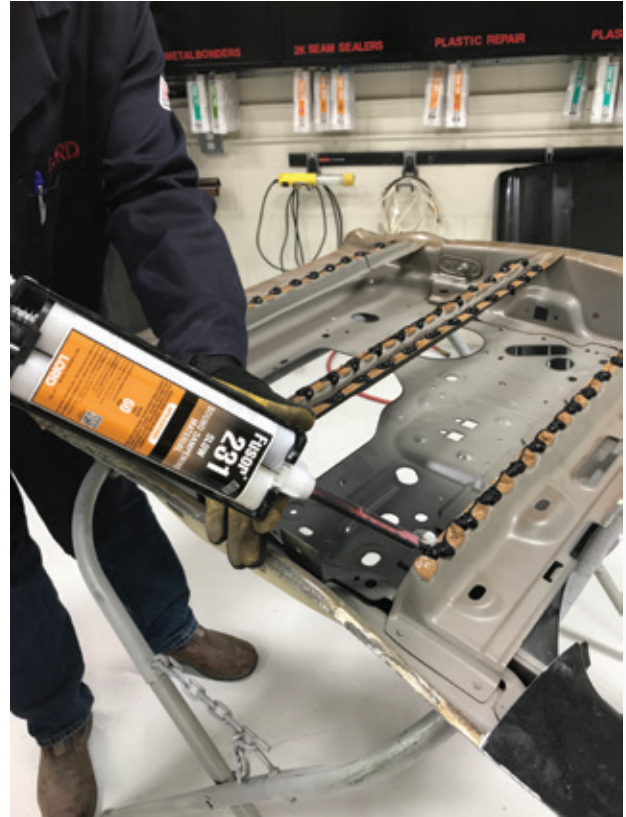

Fusor 231/234 Sound Dampening Material

TECHNICAL DATA	
Appearance	Black Paste
Base Chemistry	Urethane
Work Time	60 minutes @ 70°F (21°C)
Full Cure	24 hours @ 70°F (21°C)

For more information visit us at [Fusor.com](http://Fusor.com) or call + 1 800 234 Fusor (3876) to speak with a customer representative.

